



5000 DH Double Hung



FEATURES

- *Mitered, fusion welded corners* ✓
- *One inch pre-punched nail fins* ✓
- *Integral J-channel* ✓
- *Jamb Depth* 2 7/8"
- *3/4" Insulated glass with exclusive ComFortMaxx™ glass*
- *Block & Tackle Balance system* ✓
- *Tilt in sash for easy cleaning* ✓
- *Fully welded sloped sill* ✓
- *Interlocking meeting rail with triple fin seal* ✓
- *Wool pile fin seal perimeter weatherstrip* ✓
- *BetterVue® screen with a fully extruded frame* Full screen
- *Matching single slider, 3 section slider and picture window* ✓
- *Optional 4 9/16" or 6 9/16" primed jamb extension available* ✓

Structural AAMA Rating R-25/DP-25
 NFRC U - Factor Value (when ordered with Low-E/Argon) 0.31

* Additional companion products: Slider, Picture, Casement, Patio Door, Custom Shapes.

OPTIONS

- Colors: *Standard Euro White or Optional Tan*
- Glass: *Low-E, Argon, Tempered, Obscure*
- Grids: *5/8" Flat or Contoured in Colonial or Prairie Configuration*
- Mulling: *Factory Mulling available*













































enviro sealed

w i n d o w s™

- * Meets egress standards ** 3050 meets minimum egress size.
- + 6'-0" heights available in oriels, cottage and equal lite options.

* Additional companion products: Slider, Picture, Casement, Patio Door, Custom Shapes.

Double Hung Sizing Matrix


RO		24"	28"	32"	36"	40"	44"	48"
	US	23½"	27½"	31½"	35½"	39½"	43½"	47½"
36"	35⅝"	 2030	 2430	 2830	 3030	 3430	 3830	 4030
44"	43⅝"	 2038	 2438	 2838	 3038	 3438	 3838	 4038
48"	47⅝"	 2040	 2440	 2840	 3040	 3440	 3840	 4040
52"	51⅝"	 2044	 2444	 2844	 3044	 3444	 3844	 4044
60"	59⅝"	 2050	 2450	 2850	 3050**	 3450*	 3850*	 4050*
72"	71⅝"	 2060+	 2460+	 2860+	 3060+	 3460+	 3860+	 4060+



Your Windows are 80% Glass.

It's important to choose a glass unit that will protect your home from losing indoor heat during the winter and absorbing outside heat in the summer.

Choose Low-E glass with argon enhanced gas to meet ENERGY STAR guidelines.

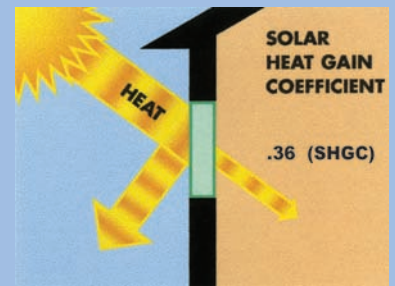

Dove Vinyl Windows
767 Sans Souci Parkway
Wilkes-Barre, PA 18706

Telephone: 570•826•0870
Fax: 570•823•9940
www.dovewindows.com

Distributed by:



4000-08-09